

# Square Mesh Wire Cloth

Dia. of Wire INCHES	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
------------------------	------------------	-----------------	------------------------------

## 1 MESH Center to Center

.331	.669	44.8 %	7.387
.307	.693	48.0 %	6.312
.283	.717	51.4 %	5.328
.263	.737	54.3 %	4.579
.250	.750	56.3 %	4.124
.225	.775	60.1 %	3.321
.207	.793	62.9 %	2.801
.192	.808	65.3 %	2.403
.177	.823	67.7 %	2.037
.162	.838	70.2 %	1.702
.148	.852	72.6 %	1.417
.135	.865	74.8 %	1.177
.120	.880	77.4 %	.928
.105	.895	80.1 %	.710
.092	.908	82.4 %	.544
.080	.920	84.6 %	.411
.072	.928	86.1 %	.333
.063	.937	87.8 %	.255

## 3/4 MESH Center to Center

.307	.443	34.9 %	8.054
.283	.467	38.8 %	7.303
.263	.487	42.1 %	6.256
.250	.500	44.4 %	5.623
.225	.525	49.0 %	4.510
.207	.543	52.4 %	3.794
.192	.558	55.3 %	3.248
.177	.573	58.3 %	2.747
.162	.588	61.4 %	2.292
.148	.602	64.4 %	1.905
.135	.615	67.2 %	1.581
.120	.630	70.5 %	1.244
.105	.645	73.9 %	.950
.092	.658	76.9 %	.728
.080	.670	79.8 %	.549
.072	.678	81.7 %	.445
.063	.687	83.9 %	.340
.054	.696	86.1 %	.249

## 5/8 MESH Center to Center

.283	.342	30.0 %	9.004
.263	.362	33.5 %	7.686
.250	.375	36.0 %	6.894
.225	.400	41.0 %	5.510
.207	.418	44.7 %	4.624
.192	.433	48.0 %	3.950
.177	.448	51.4 %	3.335
.162	.463	54.9 %	2.777
.148	.477	58.3 %	2.305

Dia. of Wire INCHES	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
------------------------	------------------	-----------------	------------------------------

## 5/8 MESH Center to Center

.135	.490	61.5 %	1.910
.120	.505	65.3 %	1.502
.105	.520	69.2 %	1.145
.092	.533	72.7 %	.879
.080	.545	76.0 %	.661
.072	.553	78.3 %	.535
.063	.562	80.9 %	.409
.054	.571	83.5 %	.300
.047	.578	85.5 %	.227







## 2 MESH

.250	.250	25.0 %	8.946
.225	.275	30.3 %	7.106
.207	.293	34.3 %	5.938
.192	.308	37.9 %	5.055
.177	.323	41.7 %	4.254
.162	.338	45.7 %	3.533
.148	.352	49.6 %	2.924
.135	.365	53.3 %	2.417
.120	.380	57.8 %	1.896
.105	.395	62.4 %	1.442
.092	.408	66.6 %	1.102
.080	.420	70.6 %	.830
.072	.428	73.3 %	.671
*.063	.437	76.4 %	.512
.054	.446	79.6 %	.376
.047	.453	82.1 %	.284
.041	.459	84.3 %	.216
.035	.465	86.5 %	.157

\* Market Grades

## 2-1/4 MESH

.225	.219	24.3 %	8.171
.207	.237	28.4 %	6.809
.192	.252	32.2 %	5.784
.177	.267	36.1 %	4.857
.162	.282	40.3 %	4.023
.148	.296	44.4 %	3.325
.135	.309	48.3 %	2.743
.120	.324	53.1 %	2.148
.105	.339	58.2 %	1.632
.092	.352	62.7 %	1.245
.080	.364	67.1 %	.937
.072	.372	70.1 %	.757
.063	.381	73.5 %	.578
.054	.390	77.0 %	.423
.047	.397	79.8 %	.320
.041	.403	82.2 %	.243
.035	.409	84.7 %	.177

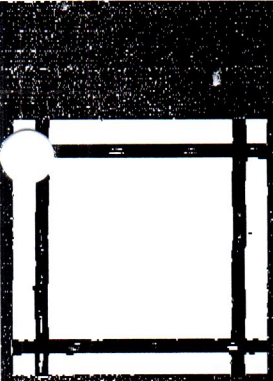

# Square Mesh Wire Cloth

Dia. of Wire	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
INCHES			

## 2-1/2 MESH

.225	.175	19.1 %	9.293
.207	.193	23.3 %	7.722
.192	.208	27.0 %	6.544
.177	.223	31.1 %	5.482
.162	.238	35.4 %	4.531
.148	.252	39.7 %	3.737
.135	.265	43.9 %	3.078
.120	.280	49.0 %	2.406
.105	.295	54.4 %	1.824
.092	.308	59.3 %	1.390
.080	.320	64.0 %	1.044
.072	.328	67.2 %	.843
.063	.337	71.0 %	.643
.054	.346	74.8 %	.471
.047	.353	77.9 %	.356
.041	.359	80.6 %	.270
.035	.365	83.3 %	.197

## 2-3/4 MESH

.177	.187	26.4 %	6.134
.162	.202	30.9 %	5.058
.148	.216	35.3 %	4.163
.135	.229	39.7 %	3.422
.120	.244	45.0 %	2.670
.105	.259	50.7 %	2.020
.092	.272	56.0 %	1.537
.080	.284	61.0 %	1.153
.072	.292	64.5 %	.930
.063	.301	68.5 %	.709
.054	.310	72.7 %	.519
.047	.317	76.0 %	.392
.041	.323	78.9 %	.298
.035	.329	81.9 %	.217

## 3 MESH

.162	.171	26.3 %	5.604
.148	.185	30.8 %	4.602
.135	.198	35.3 %	3.776
.120	.213	40.8 %	2.939
.105	.228	46.8 %	2.220
.092	.241	52.3 %	1.687
.080	.253	57.6 %	1.264
.072	.261	61.3 %	1.019
.063	.270	65.6 %	.776
.054	.279	70.1 %	.567
.047	.286	73.6 %	.428
.041	.292	76.7 %	.325
.035	.298	79.9 %	.237
.032	.301	81.5 %	.197

\* Market Grades

Dia. of Wire	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
INCHES			

## 3-1/4 MESH

.148	.160	27.0 %	5.056
.135	.173	31.6 %	4.140
.120	.188	37.3 %	3.216
.105	.203	43.5 %	2.424
.092	.216	49.3 %	1.838
.080	.228	54.9 %	1.376
.072	.236	58.8 %	1.108
.063	.245	63.4 %	.843
.054	.254	68.1 %	.616
.047	.261	72.0 %	.465
.041	.267	75.3 %	.353
.035	.273	78.7 %	.256
.032	.276	80.5 %	.214

## 3-1/2 MESH








.148	.138	23.3 %	5.250
.135	.151	27.9 %	4.290
.120	.166	33.8 %	3.499
.105	.181	40.1 %	2.632
.092	.194	46.1 %	1.993
.080	.206	52.0 %	1.489
.072	.214	56.1 %	1.198
.063	.223	60.9 %	.911
.054	.232	65.9 %	.665
.047	.239	70.0 %	.502
.041	.245	73.5 %	.381
.035	.251	77.2 %	.276
.032	.254	79.0 %	.231

## 3-3/4 MESH

.148	.119	19.9 %	5.713
.135	.132	24.5 %	4.659
.120	.147	30.4 %	3.601
.105	.162	36.9 %	2.845
.092	.175	43.1 %	2.150
.080	.187	49.2 %	1.604
.072	.195	53.5 %	1.289
.063	.204	58.5 %	.979
.054	.213	63.8 %	.714
.047	.220	68.1 %	.538
.041	.226	71.8 %	.408
.035	.232	75.7 %	.297
.032	.235	77.7 %	.248

## 4 MESH

.148	.102	16.6 %	6.191
.135	.115	21.1 %	5.038
.120	.130	27.0 %	3.886




2 1/2 Mesh .105" Wire

2 3/4 Mesh .148" Wire

3 Mesh .054" Wire

# Square Mesh Wire Cloth



4 Mesh .120\"/>

Dia. of Wire INCHES	Width of Opening INCHES	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
------------------------	----------------------------	-----------------	------------------------------

### 4 MESH

.105	.145	33.6 %	3.062
.092	.158	39.9 %	2.310
.080	.170	46.2 %	1.721
.072	.178	50.7 %	1.382
.063	.187	56.0 %	1.048
.054	.196	61.5 %	.764
.047	.203	65.9 %	.576
.041	.209	69.9 %	.436
.035	.215	74.0 %	.317
.032	.218	76.0 %	.264
.028	.222	78.9 %	.202
.025	.225	81.0 %	.161

### 4-1/2 MESH

.120	.102	21.1 %	4.479
.105	.117	27.7 %	3.337
.092	.130	34.2 %	2.639
.080	.142	40.8 %	1.959
.072	.150	45.6 %	1.570
.063	.159	51.2 %	1.189
.054	.168	57.2 %	.864
.047	.175	62.0 %	.650
.041	.181	66.3 %	.492
.035	.187	70.8 %	.357
.032	.190	73.1 %	.298
.028	.194	76.2 %	.228
.025	.197	78.6 %	.181


### 5 MESH

.120	.080	16.0 %	5.106
.105	.095	22.6 %	3.787
.092	.108	29.2 %	2.834
.080	.120	36.0 %	2.206
.072	.128	41.0 %	1.764
.063	.137	46.9 %	1.332
.054	.146	53.3 %	.967
.047	.153	58.5 %	.726
.041	.159	63.2 %	.549
.035	.165	68.1 %	.398
.032	.168	70.6 %	.332
.028	.172	74.0 %	.253
.025	.175	76.6 %	.202
.023	.177	78.3 %	.170


### 5-1/2 MESH

.105	.077	17.9 %	4.483
.092	.090	24.5 %	3.173
.080	.102	31.5 %	2.339
.072	.110	36.6 %	1.963
.063	.119	42.8 %	1.479
.054	.128	49.6 %	1.071


\* Market Grades



5 Mesh .041\"/>



5 Mesh .063\"/>



5 Mesh .080\"/>

Dia. of Wire INCHES	Width of Opening INCHES	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
------------------------	----------------------------	-----------------	------------------------------

### 5-1/2 MESH

.047	.135	55.1 %	.803
.041	.141	60.1 %	.607
.035	.147	65.4 %	.439
.032	.150	68.1 %	.366
.028	.154	71.7 %	.279
.025	.157	74.6 %	.222
.023	.159	76.5 %	.188

### 6 MESH



.092	.075	20.2 %	3.528
.080	.087	27.2 %	2.591
.072	.095	32.5 %	2.169
.063	.104	38.9 %	1.630
.054	.113	46.0 %	1.177
.047	.120	51.8 %	.882
.041	.126	57.2 %	.665
.035	.132	62.7 %	.481
.032	.135	65.6 %	.400
.028	.139	69.6 %	.305
.025	.142	72.6 %	.243
.023	.144	74.7 %	.205
.020	.147	77.8 %	.155

### 6-1/2 MESH

.092	.062	16.2 %	3.899
.080	.074	23.1 %	2.851
.072	.082	28.4 %	2.263
.063	.091	35.0 %	1.696
.054	.100	42.3 %	1.286
.047	.107	48.4 %	.961
.041	.113	53.0 %	.724
.035	.119	59.8 %	.523
.032	.122	62.9 %	.435
.028	.126	67.1 %	.332
.025	.129	70.3 %	.263
.023	.131	72.5 %	.223
.020	.134	75.9 %	.168

### 7 MESH

.080	.063	19.5 %	3.122
.072	.071	24.7 %	2.472
.063	.080	31.4 %	1.847
.054	.089	38.8 %	1.397
.047	.096	45.2 %	1.042
.041	.102	51.0 %	.784
.035	.108	57.2 %	.565
.032	.111	60.4 %	.470
.028	.115	64.8 %	.358
.025	.118	68.2 %	.284
.023	.120	70.6 %	.240
.020	.123	74.1 %	.181
.018	.125	76.6 %	.146



# Square Mesh Wire Cloth

Dia. of Wire INCHES	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
------------------------	------------------	-----------------	------------------------------

## 7-1/2 MESH

.080	.053	15.8 %	3.404
.072	.061	20.9 %	2.687
.063	.070	27.6 %	2.003
.054	.079	35.1 %	1.510
.047	.086	41.6 %	1.125
.041	.092	47.6 %	.844
.035	.098	54.0 %	.608
.032	.101	57.4 %	.506
.028	.105	62.0 %	.384
.025	.108	65.6 %	.305
.023	.110	68.1 %	.258
.020	.113	71.8 %	.194
.018	.115	74.4 %	.157

## 8 MESH

.072	.053	18.0 %	2.911
.063	.062	24.6 %	2.163
.054	.071	32.3 %	1.627
.047	.078	38.9 %	1.209
.041	.084	45.2 %	.906
.035	.090	51.8 %	.651
.032	.093	55.4 %	.541
.028	.097	60.2 %	.411
.025	.100	64.0 %	.326
.023	.102	66.6 %	.275
.020	.105	70.6 %	.207
.018	.107	73.3 %	.168
.017	.108	74.6 %	.149


## 8-1/2 MESH

.072	.046	15.3 %	3.143
.063	.055	21.9 %	2.328
.054	.064	29.6 %	1.659
.047	.071	36.4 %	1.294
.041	.077	42.8 %	.968
.035	.083	49.8 %	.695
.032	.086	53.4 %	.577
.028	.090	58.5 %	.438
.025	.093	62.5 %	.348
.023	.095	65.2 %	.293
.020	.098	69.4 %	.221
.018	.100	72.3 %	.178
.017	.101	73.7 %	.159

## 9 MESH

.072	.039	12.3 %	3.382
.063	.048	18.7 %	2.498
.054	.057	26.3 %	1.774
.047	.064	33.2 %	1.382
.041	.070	39.7 %	1.032
.035	.076	46.8 %	.740

\* Market Grades



8 Mesh .028" Wire

Dia. of Wire INCHES	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
------------------------	------------------	-----------------	------------------------------

## 9 MESH

.032	.079	50.6 %	.614
.028	.083	55.8 %	.466
.025	.086	59.9 %	.369
.023	.088	62.7 %	.311
.020	.091	67.1 %	.234
.018	.093	70.1 %	.189
.017	.094	71.6 %	.168
.016	.095	73.1 %	.149

## 9-1/2 MESH

.063	.042	15.9 %	2.673
.054	.051	23.5 %	1.893
.047	.058	30.4 %	1.471
.041	.064	37.0 %	1.097
.035	.070	44.2 %	.785
.032	.073	48.1 %	.651
.028	.077	53.5 %	.493
.025	.080	57.8 %	.391
.023	.082	60.7 %	.329
.020	.085	65.2 %	.248
.018	.087	68.3 %	.200
.017	.088	69.9 %	.178
.016	.089	71.5 %	.157

## 10 MESH


.063	.037	13.7 %	2.854
.054	.046	21.2 %	2.015
.047	.053	28.1 %	1.484
.041	.059	34.8 %	1.163
.035	.065	42.3 %	.831
.032	.068	46.2 %	.688
.028	.072	51.8 %	.521
.025	.075	56.3 %	.412
.023	.077	59.3 %	.347
.020	.080	64.0 %	.261
.018	.082	67.2 %	.211
.017	.083	68.9 %	.188
.016	.084	70.6 %	.166
.015	.085	72.3 %	.146

## 11 MESH


.054	.037	16.6 %	2.269
.047	.044	23.4 %	1.663
.041	.050	30.3 %	1.233
.035	.056	37.9 %	.924
.032	.059	42.1 %	.764
.028	.063	48.0 %	.578
.025	.066	52.7 %	.456
.023	.068	56.0 %	.384
.020	.071	61.0 %	.288




12 Mesh .023" Wire




10 Mesh .047" Wire




10 Mesh .032" Wire



10 Mesh .025" Wire



8 Mesh .041" Wire



8 Mesh .028" Wire

# Square Mesh Wire Cloth

Dia. of Wire	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
INCHES			

## 11 MESH

.018	.073	64.5 %	.233
.017	.074	66.3 %	.207
.016	.075	68.1 %	.183
.015	.076	69.9 %	.161

## 12 MESH

.047	.036	18.7 %	1.851
.041	.042	25.4 %	1.367
.035	.048	33.2 %	1.021
.032	.051	37.5 %	.843
.028	.055	43.6 %	.635
.025	.058	48.4 %	.501
.023	.060	51.8 %	.422
.020	.063	57.2 %	.316
.018	.065	60.8 %	.255
.017	.066	62.7 %	.227
.016	.067	64.5 %	.200
.015	.068	66.6 %	.176
.014	.069	68.6 %	.153

## 13 MESH

.041	.036	21.9 %	1.506
.035	.042	29.8 %	1.064
.032	.045	34.2 %	.923
.028	.049	40.6 %	.694
.025	.052	45.7 %	.547
.023	.054	49.3 %	.459
.020	.057	54.9 %	.344
.018	.059	58.8 %	.277
.017	.060	60.8 %	.246
.016	.061	62.9 %	.218
.015	.062	65.0 %	.191
.014	.063	67.1 %	.166

## 14 MESH

.041	.030	17.6 %	1.650
.035	.036	25.4 %	1.161
.032	.039	29.8 %	1.005
.028	.043	36.2 %	.755
.025	.046	41.5 %	.593
.023	.048	45.2 %	.498
.020	.051	51.0 %	.372
.018	.053	55.1 %	.299
.017	.054	57.2 %	.266
.016	.055	59.3 %	.235
.015	.056	61.5 %	.206
.014	.057	63.7 %	.179
.0135	.0575	64.8 %	.166
.013	.058	65.9 %	.154
.012	.059	68.2 %	.131
.011	.060	70.6 %	.110
.010	.061	72.9 %	.090

\* Market Grades

Dia. of Wire	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
INCHES			

## 15 MESH




.041	.026	15.2 %	1.800
.035	.032	23.0 %	1.262
.032	.035	27.6 %	1.036
.028	.039	34.2 %	.776
.025	.042	39.7 %	.641
.023	.044	43.6 %	.537
.020	.047	49.7 %	.401
.018	.049	54.0 %	.322
.017	.050	56.3 %	.286
.016	.051	58.5 %	.253
.015	.052	60.8 %	.221
.014	.053	63.2 %	.192
.0135	.0535	64.4 %	.179
.013	.054	65.6 %	.165
.012	.055	68.1 %	.141
.011	.056	70.6 %	.118
.010	.057	73.1 %	.097

## 16 MESH

.041	.0215	11.8 %	1.956
.035	.0275	19.4 %	1.366
.032	.0305	23.8 %	1.119
.028	.0345	30.5 %	.836
.025	.0375	36.0 %	.689
.023	.0395	39.9 %	.577
.020	.0425	46.2 %	.430
.018	.0445	50.7 %	.345
.017	.0455	53.0 %	.307
.016	.0465	55.4 %	.271
.015	.0475	57.8 %	.237
.014	.0485	60.2 %	.206
.0135	.0490	61.5 %	.191
.013	.0495	62.7 %	.177
.012	.0505	65.3 %	.150
.011	.0515	67.9 %	.126
.010	.0525	70.6 %	.104
.0095	.0530	71.9 %	.094

## 18 MESH

.035	.0206	13.7 %	1.584
.032	.0236	18.0 %	1.294
.028	.0276	24.7 %	.961
.025	.0306	30.3 %	.750
.023	.0326	34.4 %	.660
.020	.0356	41.1 %	.490
.018	.0376	45.8 %	.392
.017	.0386	48.3 %	.348
.016	.0396	50.8 %	.307
.015	.0406	53.4 %	.268
.014	.0416	56.1 %	.233
.0135	.0421	57.4 %	.216

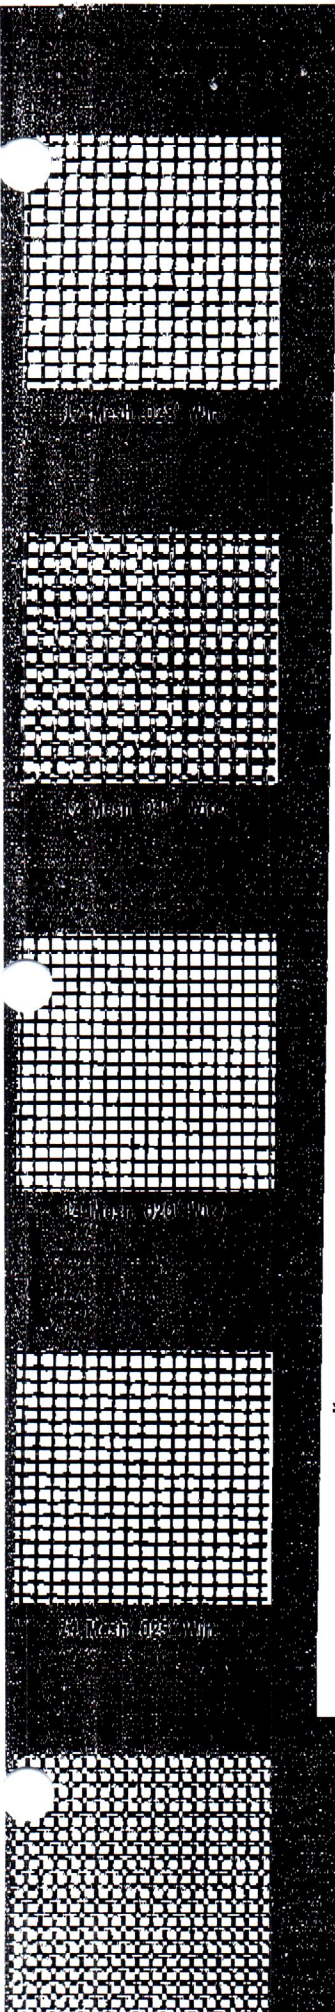

# Square Mesh Wire Cloth

Dia. of Wire	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
INCHES			

## 18 MESH

.013	.0426	58.8 %	.200
.012	.0436	61.6 %	.170
.011	.0446	64.4 %	.142
.010	.0456	67.4 %	.117
.0095	.0461	68.9 %	.105
.009	.0466	70.4 %	.095

## 20 MESH

.032	.0180	13.0 %	1.479
.028	.0220	19.4 %	1.093
.025	.0250	25.0 %	.850
.023	.0270	29.2 %	.708
.020	.0300	36.0 %	.552
.018	.0320	41.0 %	.441
.017	.0330	43.6 %	.391
.016	.0340	46.2 %	.344
.015	.0350	49.0 %	.301
.014	.0360	51.8 %	.261
.0135	.0365	53.3 %	.242
.013	.0370	54.8 %	.224
.012	.0380	57.8 %	.190
.011	.0390	60.8 %	.159
.010	.0400	64.0 %	.131
.0095	.0405	65.6 %	.118
.009	.0410	67.2 %	.105

## 22 MESH

.028	.0175	14.8 %	1.232
.025	.0205	20.3 %	.954
.023	.0225	24.5 %	.793
.020	.0255	31.5 %	.585
.018	.0275	36.6 %	.491
.017	.0285	39.3 %	.435
.016	.0295	42.1 %	.382
.015	.0305	45.0 %	.334
.014	.0315	48.0 %	.289
.0135	.0320	49.6 %	.268
.013	.0325	51.1 %	.248
.012	.0335	54.3 %	.210
.011	.0345	57.6 %	.175
.010	.0355	61.0 %	.144
.0095	.0360	62.7 %	.130
.009	.0365	64.5 %	.116

## 24 MESH

.025	.0167	16.1 %	1.064
.023	.0187	20.1 %	.882
.020	.0217	27.1 %	.648

Dia. of Wire	Width of Opening	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
INCHES			

## 24 MESH

.018	.0237	32.4 %	.515
.017	.0247	35.1 %	.480
.016	.0257	38.0 %	.421
.015	.0267	41.1 %	.367
.014	.0277	44.2 %	.318
.0135	.0282	45.8 %	.294
.013	.0287	47.4 %	.272
.012	.0297	50.8 %	.230
.011	.0307	54.3 %	.192
.010	.0317	57.9 %	.158
.0095	.0322	59.7 %	.142
.009	.0327	61.6 %	.127
.0085	.0332	63.5 %	.113
.008	.0337	65.4 %	.100
.0075	.0342	67.4 %	.088

## 26 MESH

.020	.0185	23.1 %	.713
.018	.0205	28.4 %	.566
.017	.0215	31.2 %	.526
.016	.0225	34.2 %	.461
.015	.0235	37.3 %	.402
.014	.0245	40.6 %	.347
.0135	.0250	42.3 %	.321
.013	.0255	44.0 %	.297
.012	.0265	47.5 %	.251
.011	.0275	51.1 %	.209
.010	.0285	54.9 %	.172
.0095	.0290	56.9 %	.155
.009	.0295	58.8 %	.138
.0085	.0300	60.8 %	.123
.008	.0305	62.9 %	.109
.0075	.0310	65.0 %	.095



## 28 MESH

.018	.0177	24.6 %	.618
.017	.0187	27.4 %	.545
.016	.0197	30.4 %	.503
.015	.0207	33.6 %	.437
.014	.0217	36.9 %	.377
.0135	.0222	38.6 %	.349
.013	.0227	40.4 %	.322
.012	.0237	44.0 %	.272
.011	.0247	47.8 %	.227
.010	.0257	51.8 %	.186
.0095	.0262	53.8 %	.167
.009	.0267	55.9 %	.150
.0085	.0272	58.0 %	.133
.008	.0277	60.2 %	.118
.0075	.0282	62.3 %	.103

\*

\*

\* Market Grades

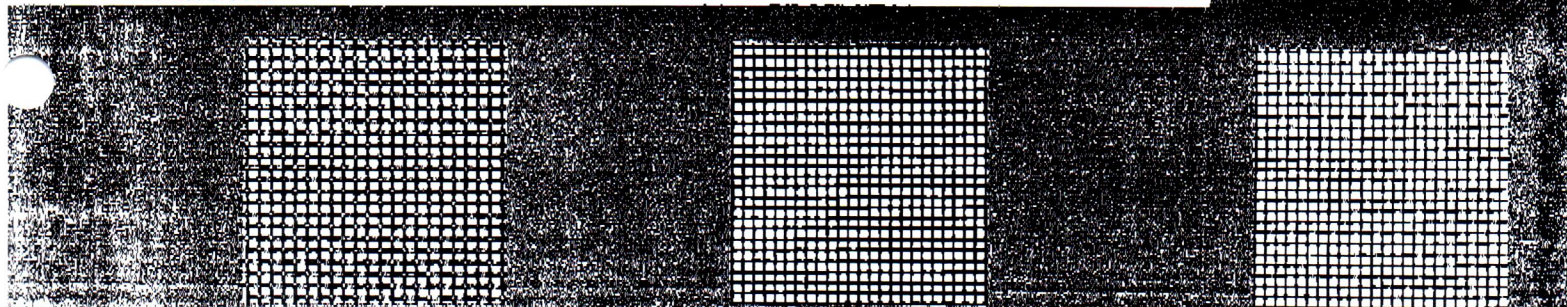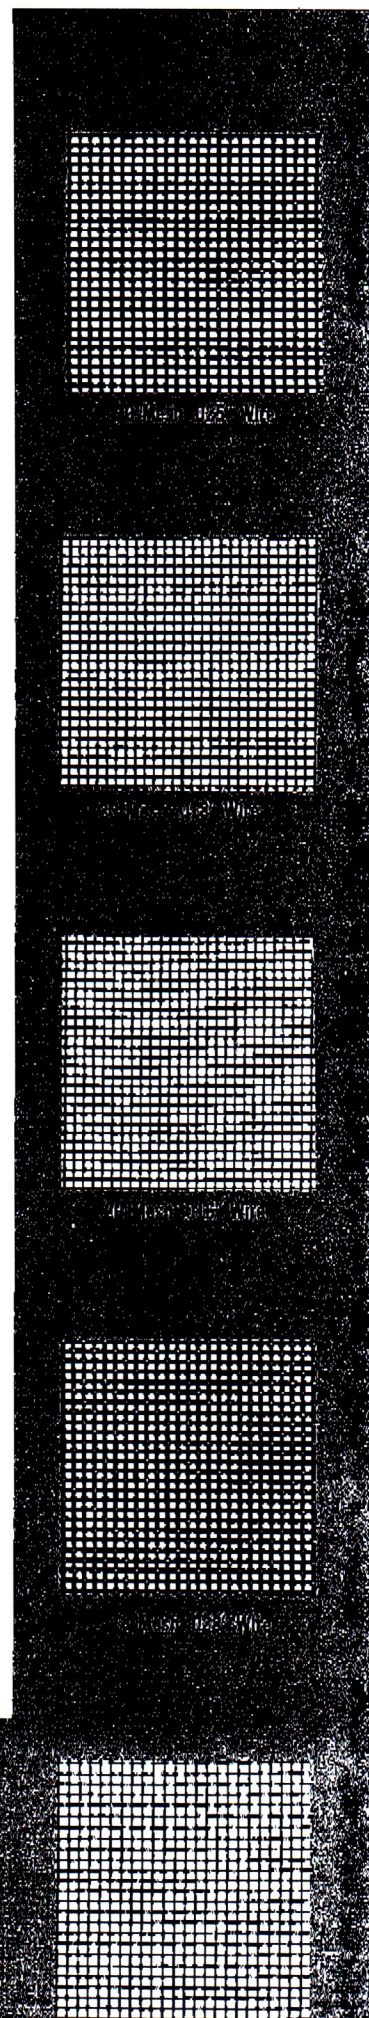

# Square Mesh Wire Cloth

Dia. of Wire INCHES	Width of Opening INCHES	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
------------------------	----------------------------	-----------------	------------------------------

## 30 MESH

.017	.0163	23.9 %	.592
.016	.0173	26.9 %	.518
.015	.0183	30.1 %	.474
.014	.0193	33.5 %	.408
.0135	.0198	35.3 %	.378
.013	.0203	37.1 %	.348
.012	.0213	40.8 %	.294
.011	.0223	44.8 %	.245
.010	.0233	48.9 %	.200
.0095	.0238	51.0 %	.180
.009	.0243	53.1 %	.161
.0085	.0248	55.4 %	.143
.008	.0253	57.6 %	.126
.0075	.0258	59.9 %	.111

## 32 MESH

.016	.0153	24.0 %	.560
.015	.0163	27.2 %	.486
.014	.0173	30.6 %	.440
.0135	.0178	32.4 %	.407
.013	.0183	34.3 %	.375
.012	.0193	38.1 %	.316
.011	.0203	42.2 %	.263
.010	.0213	46.5 %	.215
.0095	.0218	48.7 %	.193
.009	.0223	50.9 %	.173
.0085	.0228	53.2 %	.153
.008	.0233	55.6 %	.135
.0075	.0238	58.0 %	.118
.007	.0243	60.5 %	.103

## 35 MESH

.016	.0126	19.4 %	.624
.015	.0136	22.7 %	.541
.014	.0146	26.1 %	.465
.0135	.0151	27.9 %	.452
.013	.0156	29.8 %	.416
.012	.0166	33.8 %	.350
.011	.0176	37.9 %	.290
.010	.0186	42.4 %	.237
.0095	.0191	44.7 %	.213
.009	.0196	47.1 %	.190
.0085	.0201	49.5 %	.169
.008	.0206	52.0 %	.149
.0075	.0211	54.5 %	.130
.007	.0216	57.2 %	.113

## 38 MESH

.014	.0123	21.8 %	.513
.0135	.0128	23.7 %	.473
.013	.0133	25.5 %	.436

Dia. of Wire INCHES	Width of Opening INCHES	% of Open Areas	Lbs. per Sq. Ft. Plain Steel
------------------------	----------------------------	-----------------	------------------------------

## 38 MESH

.012	.0143	29.5 %	.385
.011	.0153	33.8 %	.319
.010	.0163	38.4 %	.260
.0095	.0168	40.8 %	.233
.009	.0173	43.2 %	.208
.0085	.0178	45.8 %	.185
.008	.0183	48.4 %	.163
.0075	.0188	51.0 %	.142
.007	.0193	53.8 %	.123

## 40 MESH

.0135	.0115	21.2 %	.530
.013	.0120	23.0 %	.488
.012	.0130	27.0 %	.409
.011	.0140	31.4 %	.338
.010	.0150	36.0 %	.276
.0095	.0155	38.4 %	.247
.009	.0160	41.0 %	.220
.0085	.0165	43.6 %	.195
.008	.0170	46.2 %	.172
.0075	.0175	49.0 %	.150
.007	.0180	51.8 %	.130

## 42 MESH

.0135	.0103	18.7 %	.535
.013	.0108	20.6 %	.518
.012	.0118	24.6 %	.434
.011	.0128	28.9 %	.358
.010	.0138	33.6 %	.292
.0095	.0143	36.1 %	.261
.009	.0148	38.6 %	.233

## 45 MESH

.013	.0092	17.1 %	.536
.012	.0102	21.1 %	.448
.011	.0112	25.4 %	.369
.010	.0122	30.1 %	.316
.0095	.0127	32.7 %	.283
.009	.0132	35.3 %	.252
.0085	.0137	38.0 %	.223
.008	.0142	40.8 %	.196
.0075	.0147	43.8 %	.171

## 50 MESH

.0095	.0105	27.6 %	.320
.009	.0110	30.3 %	.284
.0085	.0115	33.1 %	.251
.008	.0120	36.0 %	.221
.0075	.0125	39.1 %	.192

\* Market Grades